


Zuignapvinger
verend, niet verdraaibaar
met schroefdraad
vaste kop

Gripper arm
spring-loaded, secured against contortion
with insert nut
fixed head

305



300

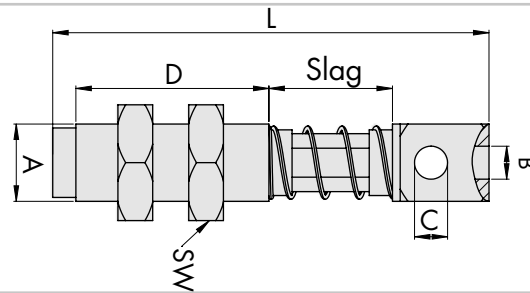

Artikel - Nr. Article - No.	A	B	C	D	L	Slag Stroke	SW AF	Gewicht Weight
305 42 215	M 14 x 1	1/8	1/8	32	75	15	22	95 g
305 42 235	M 14 x 1	1/8	1/8	32	100	35	22	96 g
305 43 215	M 14 x 1	1/4	1/8	32	85	15	22	100 g
305 43 235	M 14 x 1	1/4	1/8	32	110	35	22	101 g
305 62 215	M 16 x 1	1/8	1/8	32	80	15	24	100 g
305 62 235	M 16 x 1	1/8	1/8	32	105	35	24	101 g
305 63 215	M 16 x 1	1/4	1/8	32	85	15	24	105 g
305 63 235	M 16 x 1	1/4	1/8	32	110	35	24	106 g
305 32 220	M 20 x 1,5	1/8	1/8	53	110	20	30	208 g
305 32 240	M 20 x 1,5	1/8	1/8	53	136	40	30	209 g
305 33 220	M 20 x 1,5	1/4	1/4	53	116	20	30	206 g
305 33 240	M 20 x 1,5	1/4	1/4	53	142	40	30	207 g

Toepassing

- Verende zuignapvinger voor haakse contactvlakken t.o.v. de zuignap. Niet verdraaibare uitvoering (voor bijv. ovale zuignappen).
- Geschikt voor vlakke- en balgzuignappen.
- Verende slag geschikt voor het opvangen van verschillen tijdens ontvormen.

Application

- Spring-loaded gripper arm for rectangular contact surface to suction cup, however secured against contortion (e. g. for oval suction cups).
- Fitting for flat- and telescope suction cups.
- Fixation of bulkhead connector. Spring deflection is fitting for adjustment of differences in movement while demoulding.

Rokoma B.V.

Postbus 14, 5500 AA Veldhoven, NL
Ambachtsweg 22, 5683 CD Best, NL

Tel.: +31 (0)40 22 65 655
Fax: +31 (0)40 22 65 515

info@rokoma.nl
www.rokoma.nl



© Rokoma